



SECTION S-S

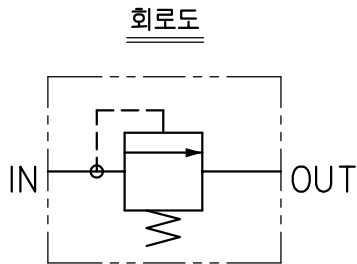

# SPECIFICATION

1. 사용유 : ISO VG 46상당
2. 사용유온 :  $-10^{\circ}\text{C} \sim 120^{\circ}\text{C}$
3. 최고사용압력 :  $350 \text{ kgf/cm}^2$
4. 최고사용유량 : 76 l/min
5. RELIEF SETTING 압력범위 :  $26 \sim 350 \text{ kgf/cm}^2$
6. 중량 : 0.25 kg

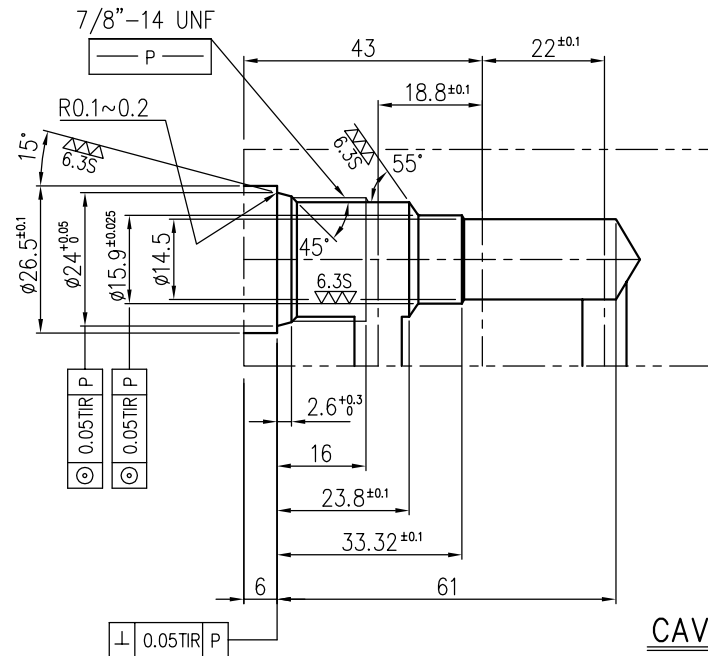

CAVITY DETAIL

15	S/P RETAINER		8841856	1	
14	O-RING			1	AS568-910(Hs90)
13	RETAINER F		8830827	1	
12	ADJUST SCREW		8841876	1	
11	LOCK NUT		8840343	1	M12xP1.25
10	BACK UP RING			1	P12용
9	O-RING			1	AP12
8	RETAINER R		8841857	1	
7	SPRING		8841882	1	350K
6	BACK UP RING			1	AS568-011용
5	O-RING			1	AS568-011
4	POPPET		8830826	1	
3	O-RING			1	AS568-014
2	BACK UP RING			1	014용 1.2T
1	SLEEVE		8830825	1	
NO	DESCRIPTION	MATERIAL	DRAW.NO	Q'TY	REMARK

<b>주식회사 덕인기공</b> DUKIN INDUSTRIES CO., LTD.		SCALE 1/1	DATE 2008.09
PLANT STANDARD FACILITY CARTRIDGE RELIEF V/V TITLE DCRV - 350K		DIM mm	
SIGN DESIGNED		REFERENCE DWG. NO.	REV
CHECKED		DRAWING NO. 8830903	REV
REVIEWED		DISKETTE NO.	
APPROVED			
NO.	DATE	REVISIONS	Q'TY CHARGE APPROVED